






Notes:  
For general notes see GN1

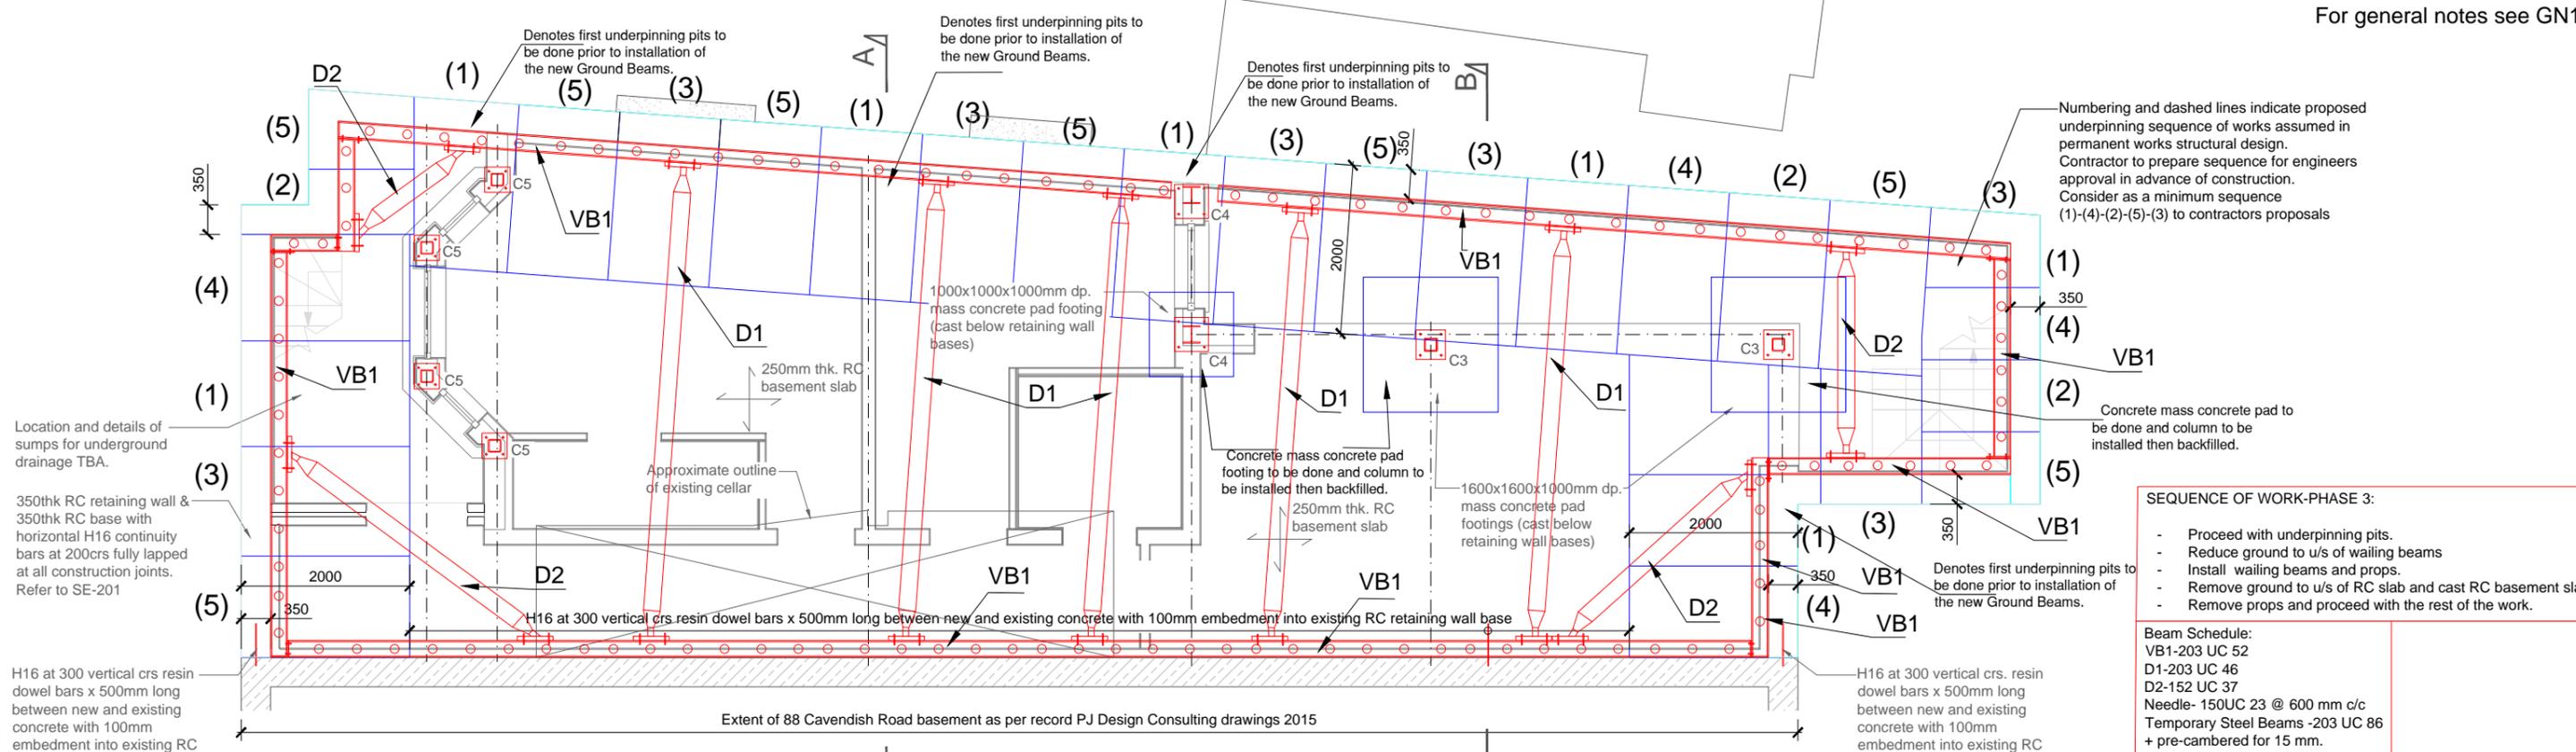

- SEQUENCE OF WORK-PHASE 3:**
- Proceed with underpinning pits.
  - Reduce ground to u/s of wailing beams
  - Install wailing beams and props.
  - Remove ground to u/s of RC slab and cast RC basement slab.
  - Remove props and proceed with the rest of the work.
- Beam Schedule:**  
 VB1-203 UC 52  
 D1-203 UC 46  
 D2-152 UC 37  
 Needle- 150UC 23 @ 600 mm c/c  
 Temporary Steel Beams -203 UC 86  
 + pre-cambered for 15 mm.

**BASEMENT PLAN-PHASE 3**

0m 1 2 3 4

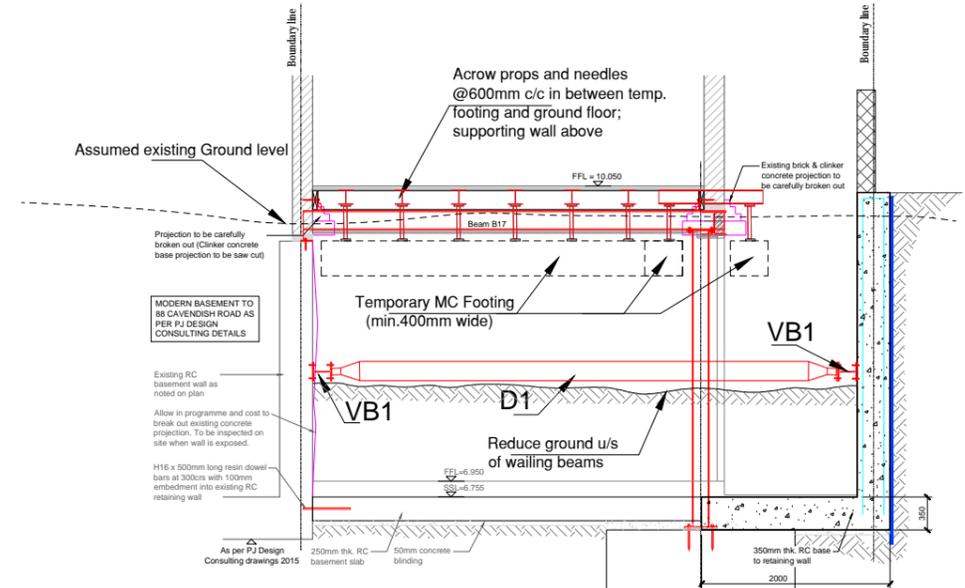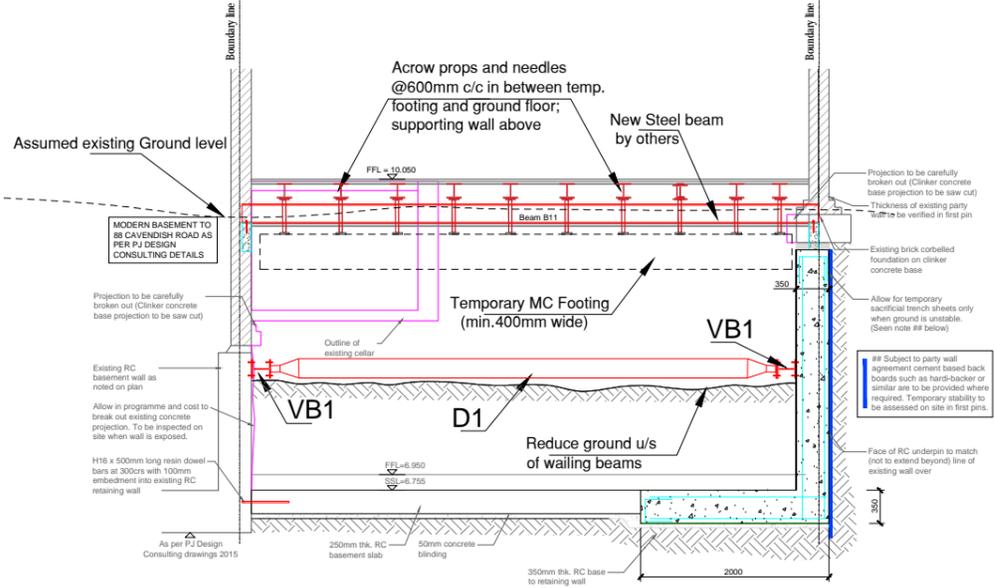

- SEQUENCE OF WORK-PHASE 1:**
- Strip out existing finishes at Ground floor
  - Construct mass concrete footing; install columns; backfill.
  - Construct underpinning pits marked as 1; backfill and dry pack leaving pockets for new steel beams at Ground Floor.

- SEQUENCE OF WORK - PHASE 2:**
- Cast temporary footing at ground floor where required and temporary prop existing walls above Ground floor.
  - Install new steel beams and dry pack above.

- SEQUENCE OF WORK-PHASE 3:**
- Proceed with underpinning pits.
  - Reduce ground to u/s of wailing beams
  - Install wailing beams and props.
  - Remove ground to u/s of RC slab and cast RC basement slab.
  - Remove props and proceed with the rest of the work.

**SECTION A-A**

**SECTION A-A and SECTION B-B**

0m 1 2 3 4

**SECTION B-B**

Concrete mass concrete pad to be done and column to be installed then backfilled.

Issued For

**Information**

General Notes

DO NOT SCALE FROM THIS DRAWING. ALL DIMENSIONS TO BE VERIFIED ON SITE BY CONTRACTOR PRIOR TO COMMENCEMENT OF ANY SHOP DRAWINGS AND ANY WORK ON SITE. REPORT ALL DISCREPANCIES TO THE ARCHITECT/ENGINEER IMMEDIATELY. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELATED ARCHITECT/ ENGINEERS DRAWINGS / DETAILS AND ALL OTHER RELEVANT INFORMATION.

Notes

Client	-
Project	90 Cavendish Road London
Drawing Title	BASEMENT PLAN-Phase 3, Sections A-A and B-B
Scale	1:75 @A3
Date	March 2017

Client

-

Project

90 Cavendish Road  
London

Drawing Title

BASEMENT PLAN-Phase 3, Sections A-A and B-B

Scale

1:75 @A3

Date

March 2017

Client

**LM ENGINEERING LTD**  
consulting engineers

15 Kinloch Drive, London, Nw9 7LL - Tel: 020 8205 1427  
Fax: 020 8205 1427

Job No.

1091

Drawing No.

TW-02-Rev A